

## Manual of the OGMA Filter Wheel (OFW)

### Manual of the OGMA Filter Wheels (OFW)

This manual is a work in progress. Please send your questions and suggestions, and we will add them.



### Connecting the OFW to a camera

The recommended method for connecting the OFW to a cooled camera is to bolt it to the front plate of the camera. If you have replaced the camera's default front plate with the OGMA O'Tilter, you can use the same method, as the O'Tilter has holes identical to those on the camera's default front plate.



Most cooled cameras have six tapped holes on the front plate around the opening of the imaging sensor. The six holes are distributed around a circumference of 62mm in diameter.

In the case of **OGMA, ZWO, and PlayerOne**, the screws needed have an **M2.5 thread**. We provide the screws. As you can see in the photo, they have a silver color.

In the case of **QHY** cameras, you will need to purchase four similar screws with an **M3 thread**.

## Steps to bolt the OFW to a camera

Before you can bolt the filter wheel to a camera, you have to open the filter wheel and remove the carousel to gain access to the holes used by the screws that will secure the filter wheel to the camera.


Follow these steps:


1. Unscrew the nine screws that hold the cover of the carousel in place.
2. Remove the cover of the carousel.
3. Unscrew the four little screws that hold the carousel to the brass center
4. Use the provided four silver screws M2.5 to attach the filter wheel to the camera. You may have to rotate the camera until the holes align.
5. Place the carousel back on the brass center and use the four tiny screws from step #3 to secure it. Don't apply too much pressure when screwing because the thread is thin and can be damaged very easily.
6. Place your filters on the carousel and take note of their position. You will need this information to configure the software.
7. Place the cover of the carousel and attach using the nine screws that you removed in step #1.

At this point, your filter wheel is connected to the camera, and the filters are placed on the carousel.

## Installation Images



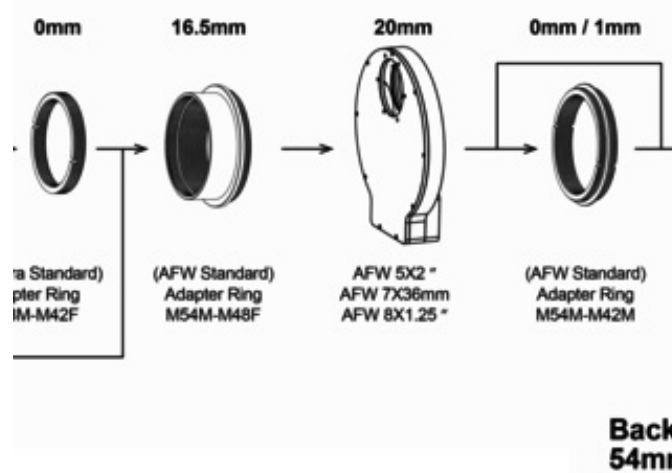

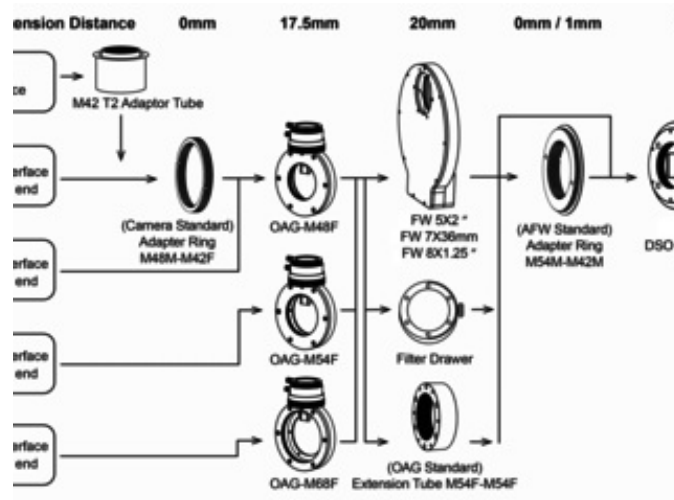

## Video of Installation

**Note:** If you remove the four tiny screws near the brass center of the carousel, you will have better access to the holes that connect the filter wheel to the camera. However, the method described here is perfectly valid.

## Filter Wheel Firmware Update

### Introduction

All OGMA filter wheels, including models [OFW736](#), [OFW72i](#), and [OFW52i](#), will require this update.

The firmware files can be downloaded below.

### Warning

Never upgrade the firmware of a device connected through a USB Hub, including the Hub on the back of OGMA cooled cameras, because it could damage the firmware of the Hub device.

Always connect the device you want to update directly to the computer before running a firmware update.

For added safety, consider removing all other USB devices from your computer while applying a firmware update.

# Firmware Files

## Identify Your Filter Wheel and Download

There are three circuit versions of the filter wheel. To ensure proper operation, select the correct firmware that matches your circuit version before flashing it. Refer to the following images when checking your filter wheel's internal layout.

Flashing the wrong firmware may cause incorrect positioning or failure to detect filters.



## Reflective Sensor

The infrared sensor and emitter are mounted on the same side of the circuit board, using a reflective detection method.

[FW\\_Reflective\\_V1.3.3.20231017.zip](#)






## Transmissive Sensor

The infrared emitter and sensor are mounted on opposite sides of the carousel, using a transmissive (through-beam) detection method.

[FW\\_Transmissive\\_V2.0.2.20250414.zip](#)

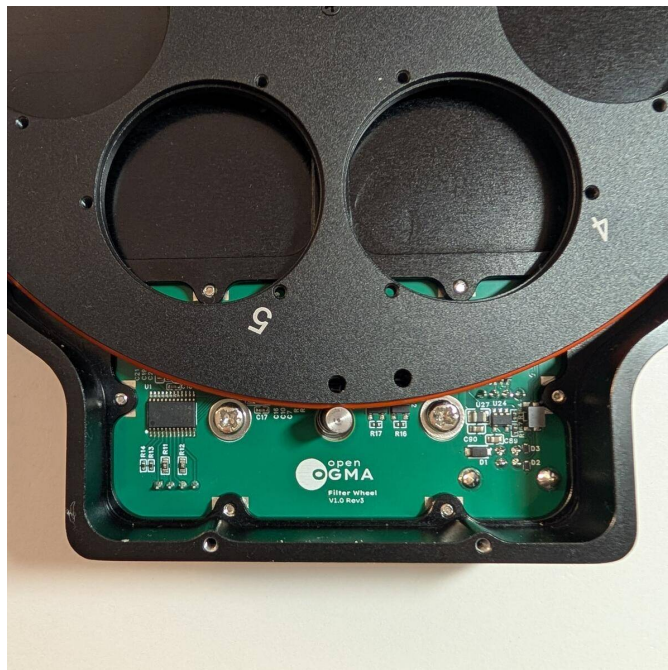

## OpenOGMA

This is the green circuit with the OpenOGMA logo.

[FW\\_OpenOGMA\\_V1.0.0.zip](#)

The files above are compressed archives. You have to extract their content before flashing the

firmware.

The Zip files for the reflective and transmissive versions contain:

1. A video tutorial in MP4 format to guide you through the steps to update the firmware.
2. A flashing tool named ***updatefw.exe***.
3. A dynamic library named ***ogmacam.dll*** is necessary to communicate with your device.
4. The actual firmware file that will be flashed has a file extension ***.icc***.

The Zip file for the OpenOGMA version contain:


1. A flashing executable tool
2. The actual firmware file with the extension .uf2

After applying a firmware update, it is a good practice to disconnect the USB cable and wait 30 seconds before reconnecting it.


## Addressed Issues

Without this update, in some rare instances, the filter wheel may lose track of its position.

### Mechanical Drawings OFW52i

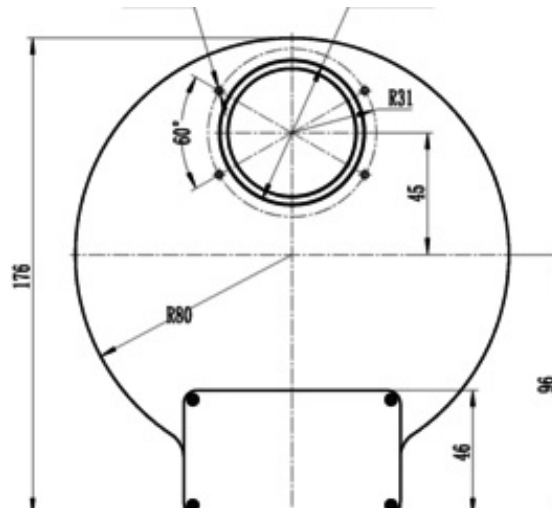






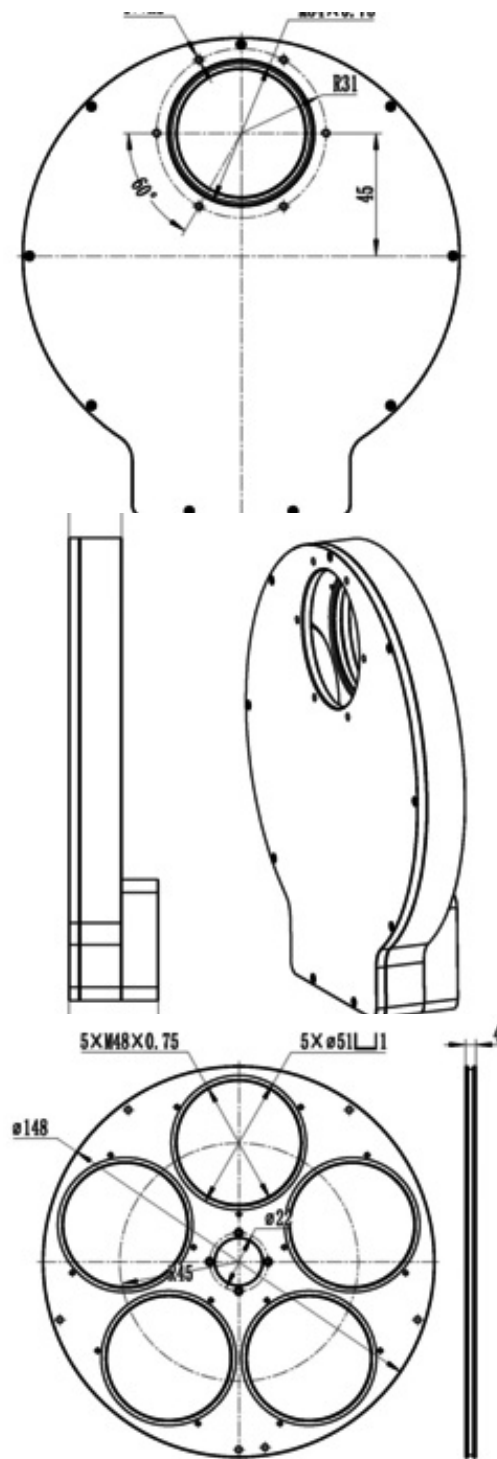

## Mechanical Drawings OFW72i

Please note that the body of this filter wheel is larger than that of the other two models by OGMA.

Click the images to enlarge.

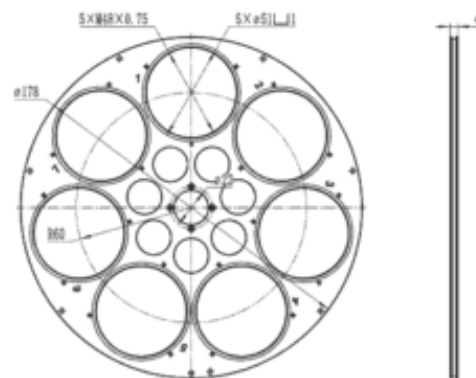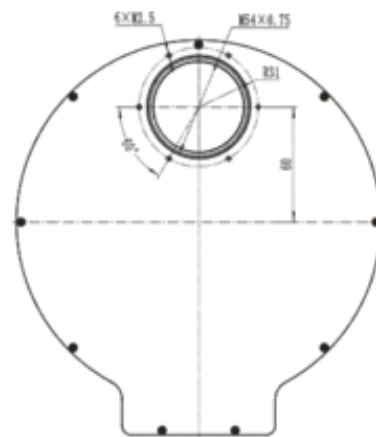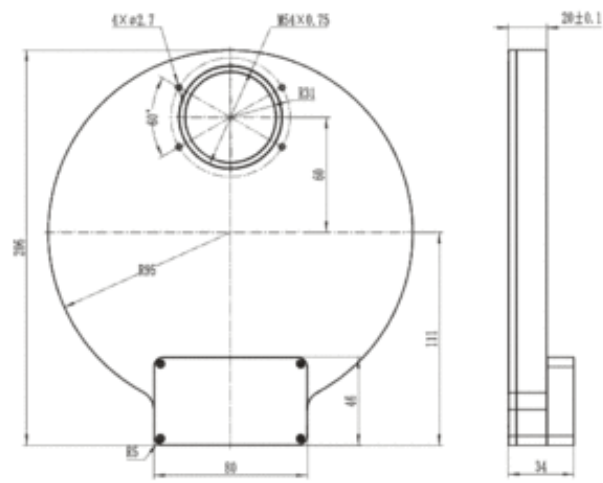

7×2inch



## Mechanical Drawings OFW736

